


P/2022/00197 RECEIVED 18.02.22

# Technical information

For Liniar flush sash windows



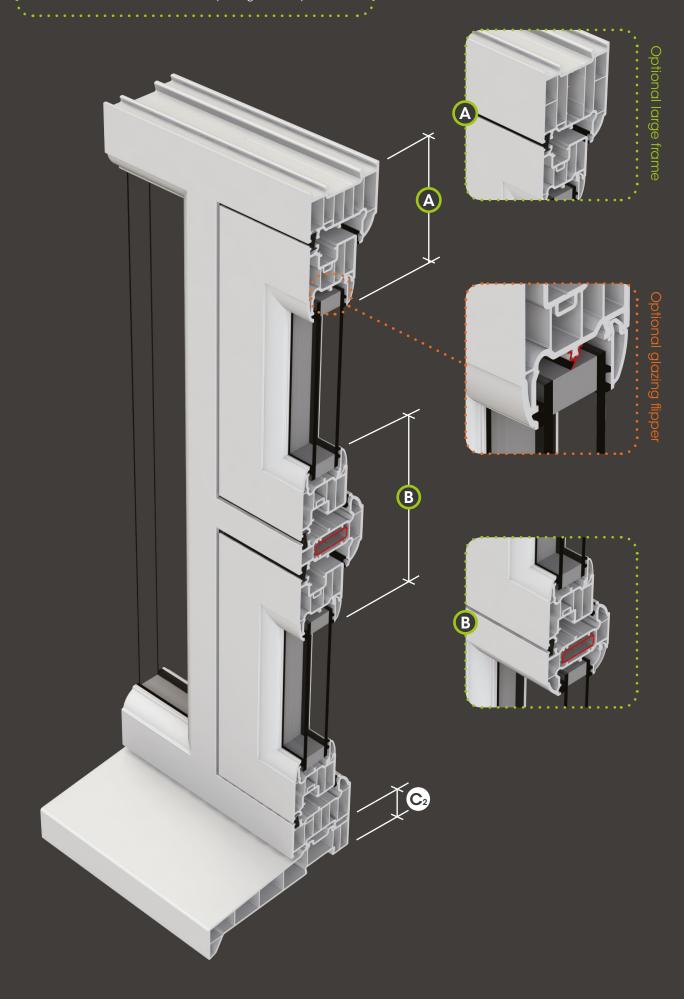

### Flush Sash Window

- Sculptured Suite
- Flush Sash finish on external faces
- 28mm double glazing
- U-values from 1.3 (DGU) and 0.9 (TGU)
- Patented co-ex gasket

### Accreditations










ISO 9001



### **Colour Options**


























Additional colours are available to order as specials. The colours shown in this brochure give an indication only.



Product	Dim. A
Small frame & sash L#W011/012 & L#W030	102mm
Large frame & sash L#W016/017 & L#W030	122mm

Product	Dim. B
Transom & sash L#W022 & L#W030	112mm
Int. transom & sash L#W027 & L#W030	132mm
Transom & 2 x sash L#W021 & 2 x L#W030	157mm
Int. transom & 2 x sash L#W026 & 2 x L#W030	1 <i>77</i> mm

Product	Dim. G
Small frame L#W011/012	57mm
Large frame L#W016/017	77mm

Product	Dim. C₂
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm

<sup>#</sup> Replace notation with (S) for sculptured suite and (C) for chamfered suite.

## Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including flush sash windows, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Flamstead House Denby Hall Business Park Denby Derbyshire DE5 8JX

Tel: +44 (0)1332 883900 Fax: +44 (0)1332 883901

Email: sales@liniar.co.uk

